

DM95000


Reverse Mount Proximity Probe Housing



Product Features

Protect important proximity probe instruments in harsh manufacturing conditions. Easily adjust the gap between machine shaft and probe or replace an extension cable without machine shutdown.

- Convenient wrench flats for installation
- Viton® O-ring sealed probe sleeve and housing
- Crush washer included to seal sleeve interior between reverse mount probe & penetration sleeve

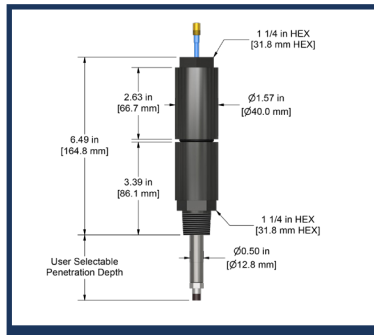

Specifications

Temperature Range: -31 °F to 340 °F (-35 °C to 171 °C)

Anodized Aluminum Body with 316L Stainless Steel Sleeve

Proximity Probe penetration depths from 0.8 in. to 12.5 in.*

3/4-14 NPT Mounting Thread

Only compatible with reverse mount, 3/8-24 threaded probes

Optional standoff adapter is designed for applications where there is not enough clearance on the machine housing to screw the reverse mount housing directly onto the machine surface

IP66 Rated**

*If a standoff adapter is selected, penetration depth will be shortened by the height of the adapter. **PTFE tape utilized to seal NPT plugs.

Ordering Information

DM95000 -		-		-	
Standoff Adapter		Penetration Depth Range		Exit Fitting Option	
00 = No Standoff 02 = 2.0 in.		022 = 0.8 in. to 2.5 in. 032 = 1.8 in. to 3.5 in. 042 = 2.8 in. to 4.5 in. 052 = 3.8 in. to 5.5 in. 062 = 4.8 in. to 6.5 in. 072 = 5.8 in. to 7.5 in. 082 = 6.8 in. to 8.5 in. 092 = 7.8 in. to 9.5 in. 102 = 8.8 in. to 10.2 in. 112 = 9.8 in. to 11.2 in. 122 = 10.8 in. to 12.2 in.		00 = No Factory Supplied Fitting, One Hole Seal 03 = One 3/4-14 to 3/8-14 NPT Reducer; One Cable Seal Grip 04 = One 3/4-14 NPT Plug Only	